Clear-Com
AN HME COMPANY



FreeSpeak Cell™ Beltpack

Quick Start Guide

Important! Before use, please make sure you have the latest documentation and system software/firmware.

FS Cell is a 9-key beltpack that works with private LTE systems and connects to an Eclipse®-HX matrix with E-IPA-HX interface card. It is part of the FreeSpeak® family of products.

Charging the Beltpack

To remove the battery, open the battery release latch and push in the direction indicated on the device.

- The beltpack uses a rechargeable Li-Ion battery.
- A dedicated drop-in battery charger (AC80) can charge up to four Li-Ion batteries simultaneously.
- You can also charge the batteries using a USB C cable to USB chargers (5 Volts, 1-3 Amps).



A. Battery release
B. Power button (quick press on, long press off)


Inserting and Removing a Nano SIM Card


The SIM card slot is located under the battery.

To access the SIM slot:

1. Remove the battery. The SIM slot is located under the cover.
2. Pull up the SIM Cover.
3. Push the SIM card into the slot until it locks into position.

To remove the SIM card, pull up the cover and push the edge of the SIM card until it gets ejected.

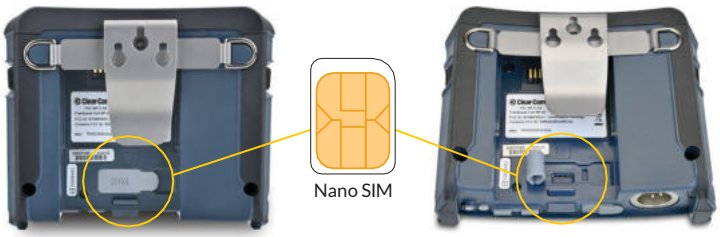

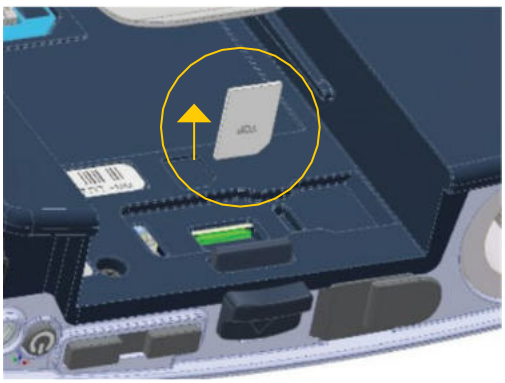

FreeSpeak Cell Beltpack

Quick Start Guide

Important! Before use, please make sure you have the latest documentation and system software/firmware.

Using the Menu System

- Configure volume and display settings for the beltpack
- Read information, such as software version
- Select a role
- Audio Routing
    - Wired Headset – Enables wired headset input and output
    - BT Headset - Enables wireless headset input and output
    - BT Listen - Enables wired headset input and output and wireless headset output
    - Mic/Speaker - Enables built-in speaker input and output

Selecting a Beltpack Role

A beltpack role is a predefined configuration profile that tells a beltpack how it behaves when it connects to a system. For example, it determines what the beltpack keys do and what audio it can access.

Unless the beltpack has been assigned a fixed role, you can select between any available roles.

1. From the Menu system, select **System** > **Connect**.
2. During the connection process, you will be prompted to select your preferred role.



A. Press and hold + and - at the same time (long press) to enter menu mode

B. Use the rotary controls to navigate through menu items

C. Cancel/exit

D. Select

Connectors and Controls



E. Headset

F. USB C:
Registration
Firmware upgrade
Charging

G. Main volume

H. Power button (quick press on, long press off)/flashlight on/off

I. Flashlight

Copyright © 2026 HME Clear-Com Ltd.
All rights reserved.